



ASSEMBLY INSTRUCTIONS

ITEM#: HG-7513-1 Camel and HG-7513-1 Black
SKU#: 810559696 and 810559558

LUXE ERGONOMIC OFFICE CHAIR

Need help? We are here for you! www.biglots.com/help/contact-us

GENERAL BEST PRACTICES FOR ASSEMBLY:

Read all instructions before starting.

Separate all parts before starting.

Clear a flat covered space to assemble.

If parts are missing, broken, damaged or worn, stop using the product until all repairs are made.

Always keep children under close supervision while they are using or around this product. Never leave children unattended.

This product is intended for domestic, indoor use only, not intended for commercial use.

WARNINGS:

Do not stand or step on this chair.

Do not rock back and forth on this chair. Use for seating only one person at one time.

Do not use this product unless all bolts and screws are firmly secured.

Do not tighten screws before all screws are in the right place.

Do not exceed maximum weight capacity of 225lbs (102kg).

Some parts may contain sharp edges. Wear protective gloves if necessary.

MAINTENANCE:


Wipe clean with a dry cloth for the upholstery and frame. Do not use bleach, acid or other abrasive cleaners. Check that all bolts and screws are securely tightened at least every 3 months.

PARTS LIST



A

x5
Castor




B

x1
Base



C

x1
Gas Lift



D

x1
Seat Plate



E

x1 (Right)
Armrest




F

x1 (Left)
Armrest



G

x1
Seat Cushion



H

x1
Back Cushion



I

x8
Cap

HARDWARE LIST



1

x4
5/16x20mm Screw



2


x8
1/4x25mm Screw



3

x1
Allen Wrench

HELPFUL HINTS






NOTE: To avoid damage, ensure screws are hand tightened.
DO NOT USE POWER TOOLS TO ASSEMBLE YOUR UNIT.





1 person

STEP 1

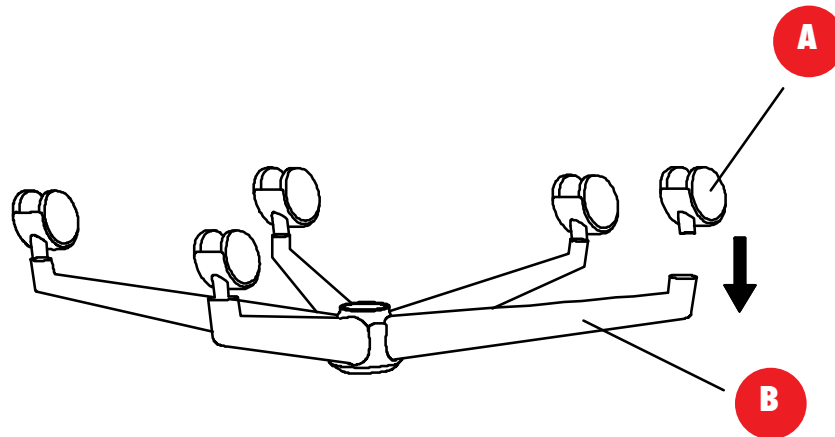






Insert the five castors (A) into the base (B) as shown in the diagram, make sure all castors are firmly inserted.

STEP 2

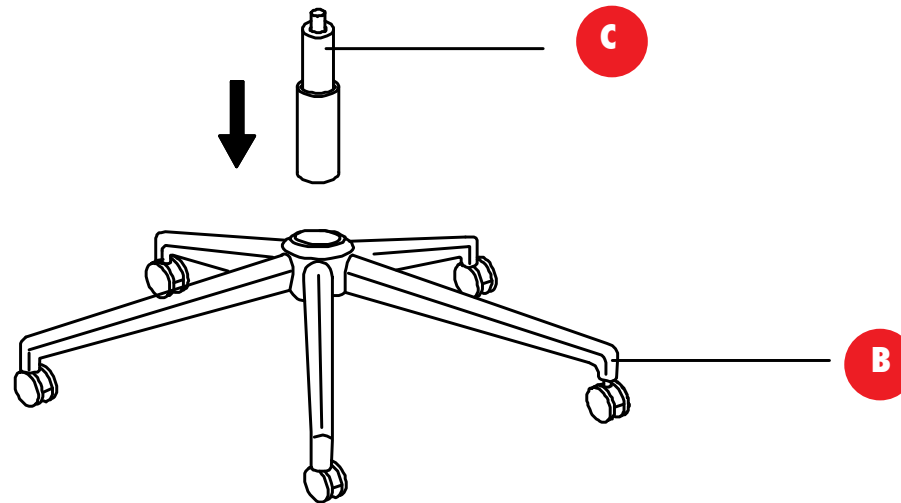


Turn the base (B) right side up, insert gas lift (C) into the centre hole of base (B) as shown in the diagram.

STEP 3

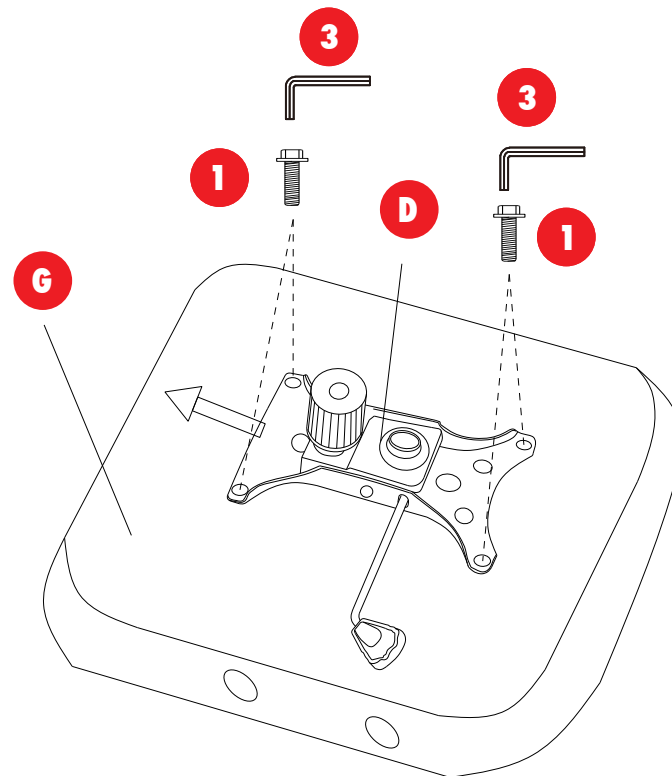




Attach the seat plate (D) to the base of the seat cushion (G) using screws (1) and tighten with allen wrench (3).
Do not full tighten the screws until all screws are in place.

STEP 4

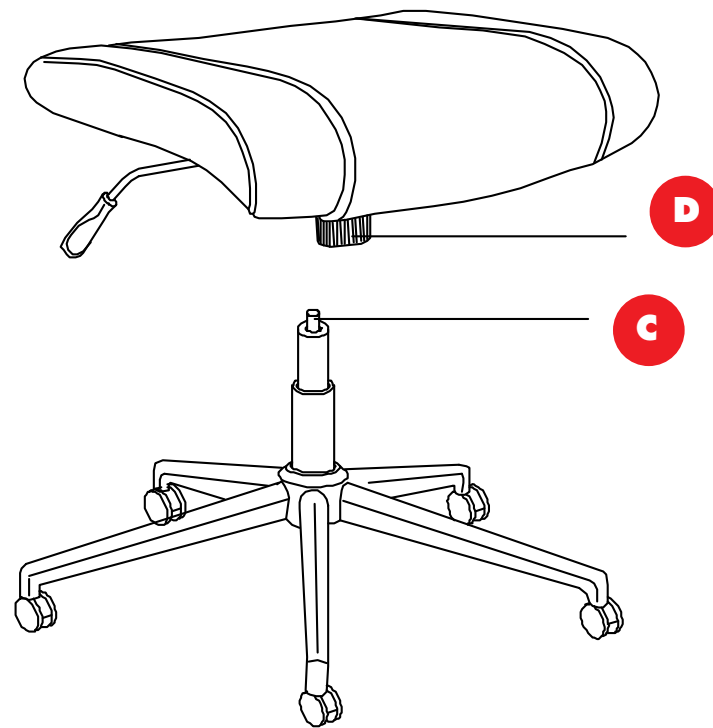




Carefully lower the seat plate (D) onto the gas lift (C) as shown in the diagram.

STEP 5

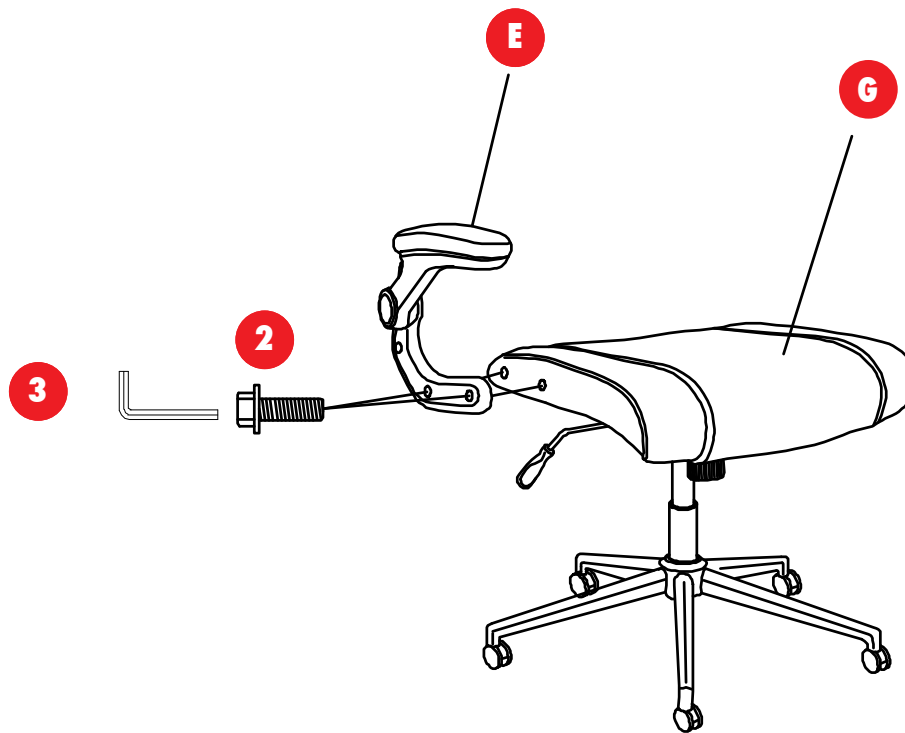




Attach the right armrest (E) to the seat cushion (G) with screws (2) and tighten 70% with allen wrench (3). DO NOT fully tighten.

STEP 6

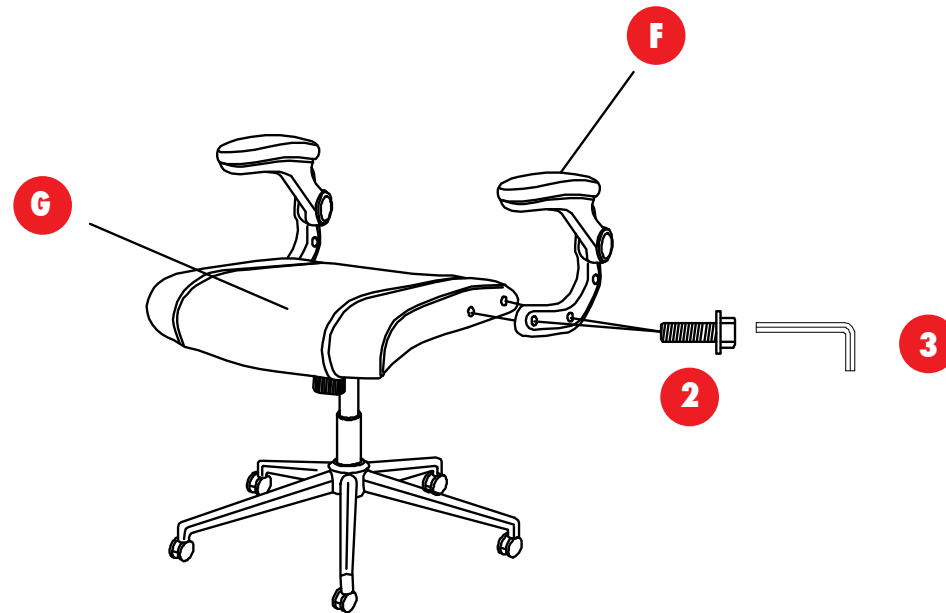



Attach the left armrest (F) to the seat cushion (G) with screws (2) and tighten 70% with allen wrench (3). DO NOT fully tighten.

STEP 7

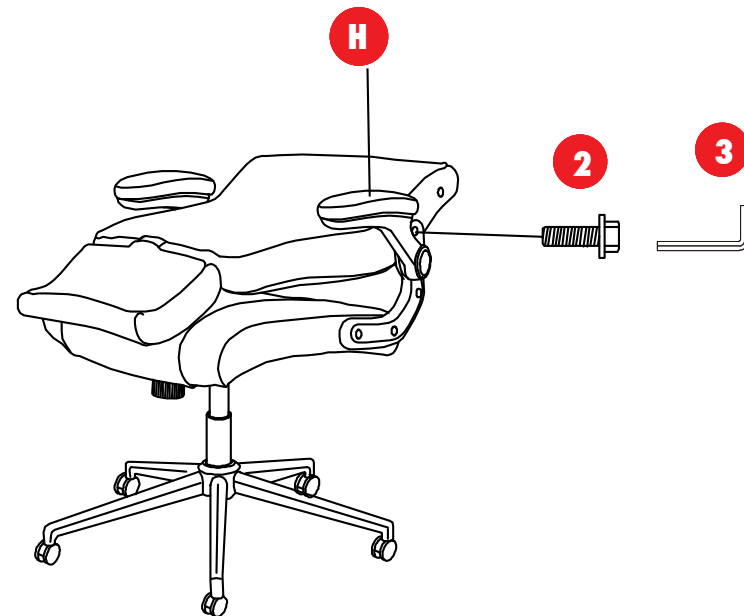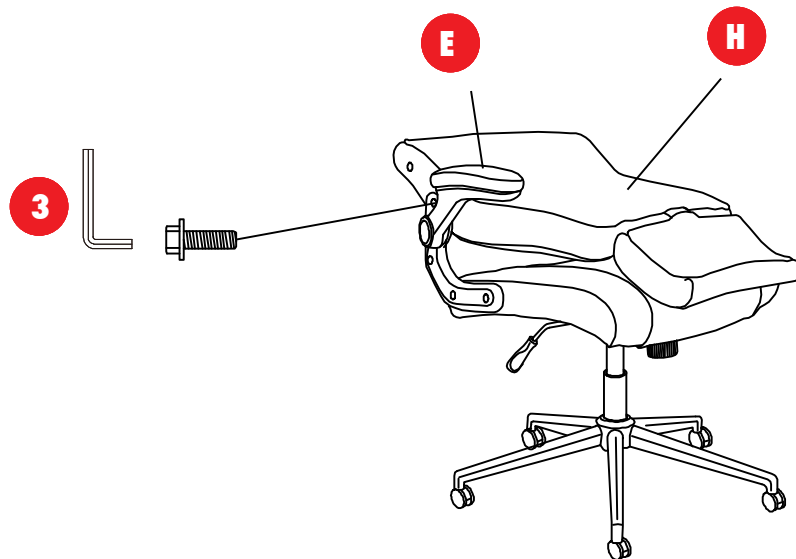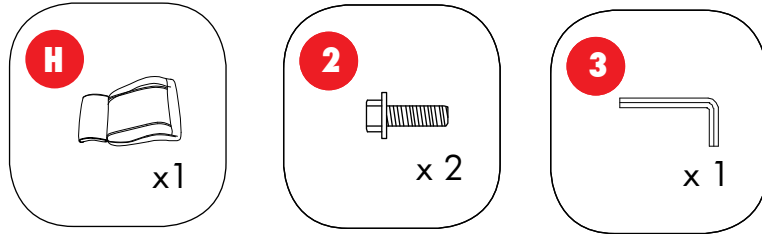

Attach the back cushion (H) to the armrests (E) and (F), insert the screws (2) into each upper hole of armrests (E) and (F) into the back cushion (H) as shown in the diagram. Tighten 70% with allen wrench (3). DO NOT fully tighten.

STEP 8



Lift the back cushion (H) up as shown in the diagram. Insert screws (2) into each bottom hole of armrests (E) and (F) into the back cushion (H). Do not tighten screws before all parts are in the right place.

STEP 9



Assembled View:



Tighten all screws using allen wrench (3). Place the caps (I) over the screws holes in the armrests (E) and (F) — four caps per side. The assembly is complete, ensure all screws are tightened before use.