

QUAIL HOLLOW LOVESEAT AND COFFEE TABLE

ASSEMBLY INSTRUCTION

ITEM#: SC-K-152DF/2
SKU# 810588221

Big Lots Stores, Inc. P.O. Box 28523; Columbus, OH 43228-0523 / Made In China

Need help? We are here for you!
Please email us at
support@numarktw.com.tw for assistance

GENERAL BEST PRACTICES FOR ASSEMBLY:

- * Determine you have adequate space for assembly from any obstruction, including buildings, tree limbs, and electrical wires.
- * Assembly by two adults is recommended
- * Keep children away during assembly. This item contains small parts which can be swallowed by children. Children should always be under adult supervision while using this product.
- * Always inspect the furniture during each use for any obstructions.
- * Do not discard any of the packaging until you have checked that you have all the parts and fittings.
- * Retain the assembly instructions for future reference.
- * The manufacturer will not accept responsibility for unauthorized repairs or modifications to this product.

WARNINGS:

Weight limit: Chair is 500lbs; table is 50lbs.

This product is for residential use only, not for commercial use.

Do not stand on product or use as a step ladder.


For optimum safety, use on even surface only!

Improper use of this product or failure to use as directed may result in injury.

MAINTENANCE:


- * Annually:
 - * Check all nuts and bolts for tightness each season and more often if used frequently.
 - * Oil all metal moving parts with a general purpose lubricating oil to ensure proper performance and safety.
- * To clean, wash frame and fabric with mild soap and water; rinse thoroughly. Dry frame completely and allow the fabric to drip dry away from direct sunlight.
- * Do not use bleach, acid, or other solvents on the fabric or frame parts.
- * To prolong the life of your furniture we recommend storage in a dry area when not in use or during austere weather conditions.

PARTS LIST



A

x 1
Tabletop (12 Metal Washers
and 12 M6 x 15L Bolts attached)



B1

x 2
Table Leg (1 Metal Washer
and 1 M6 x 30L Bolt attached)




B2

x 2
Table Leg (1 Metal Washer
and 1 M6 x 30L Bolt attached)



C

x 1
Metal Central Ring




D1

x 1
Right Arm




D2

x 1
Left Arm




E

x 1
Seat




F

x 1
Back



G

x 2
Seat Cushion



H

x 2
Back Cushion

HARDWARE LIST



la

1 spare
M6 x 15L Bolt



lb

x 6
M6 x 18L Bolt



lc

x 1 spare
M6 x 30L Bolt



ld

x 5
M6 x 40L Bolt



le

x 11
Metal Washer



lf

x 1
Allen Wrench

STEP 1

Attach 1 table leg (B1) to the table top (A) with 3 M6 x 15L bolts (la) and 3 metal washers (le) which removed from the table top.
Do not tighten completely.
Repeat procedure for the other leg (B1).
For the table leg (B2), follow the same procedure as legs (B1).

la




(remove from
the tabletop)
x12

le



(remove from
the tabletop)
x12

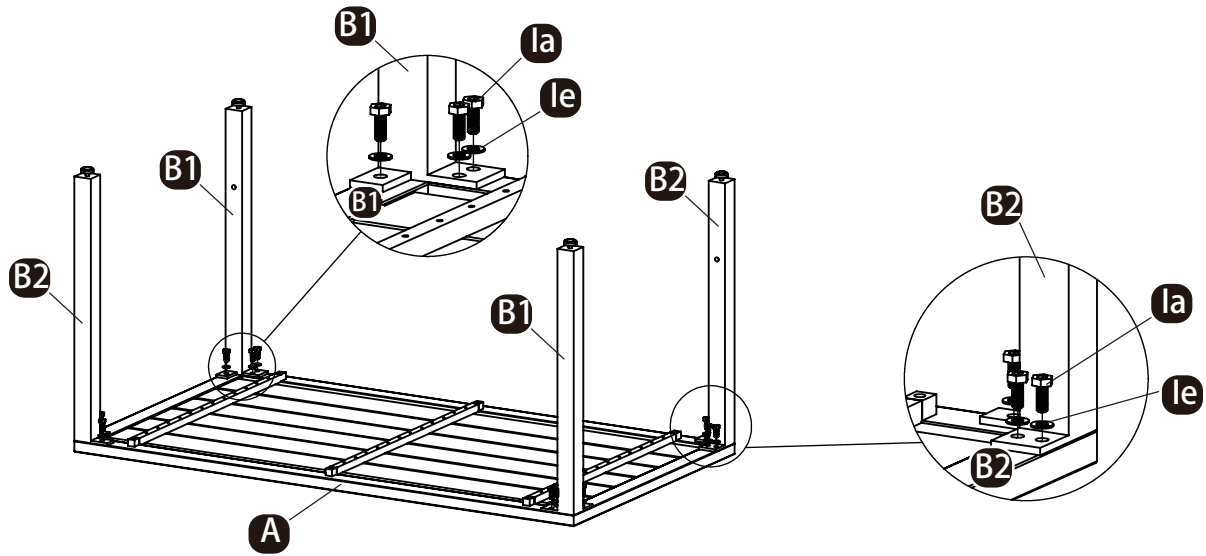

STEP 2

Attach 1 metal central ring (C) to the table leg (B1) with 1 M6 x30L bolt (lc) and 1 metal washer (le) which removed from the table leg.
Do not tighten completely.
Repeat procedure for the other leg (B1).
For the table leg (B2), follow the same procedure as legs (B1).

lc




(remove from
the table leg)
x4

le




(remove from
the table leg)
x4

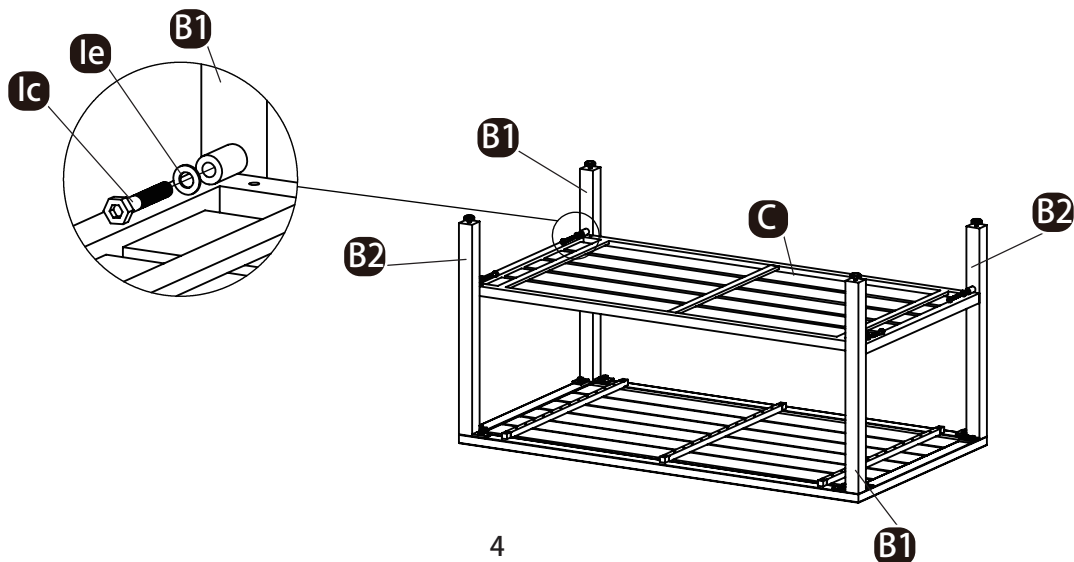




STEP 3

Turn the table over. Securely tighten all bolts.
Readjusting level by twisting knobs on the bottom
of legs as desired.

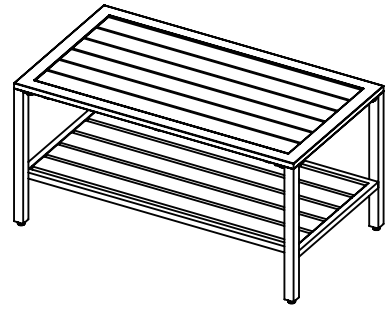




STEP 4

Attach the right arm (D1) to the seat (E) with 3
M6 x 18L bolts (lb) and 3 metal washers (le).
Do not tighten completely.
Repeat procedure for the other left arm (D2).

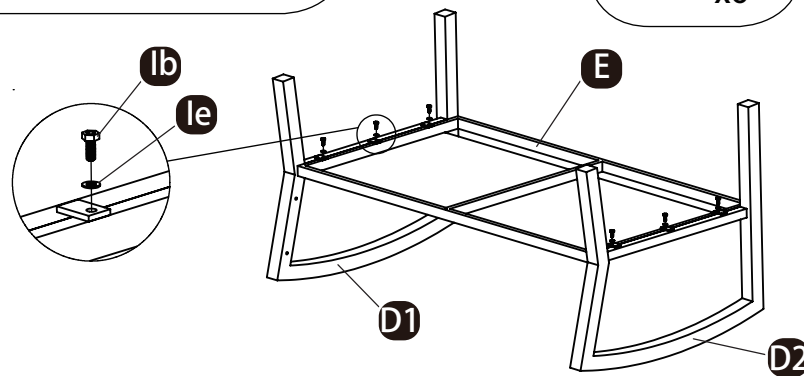




STEP 5

Attach the back (F) to the seat (E) with 1
M6 x 40L bolt (ld) and 1 metal washer (le).
Do not tighten completely.

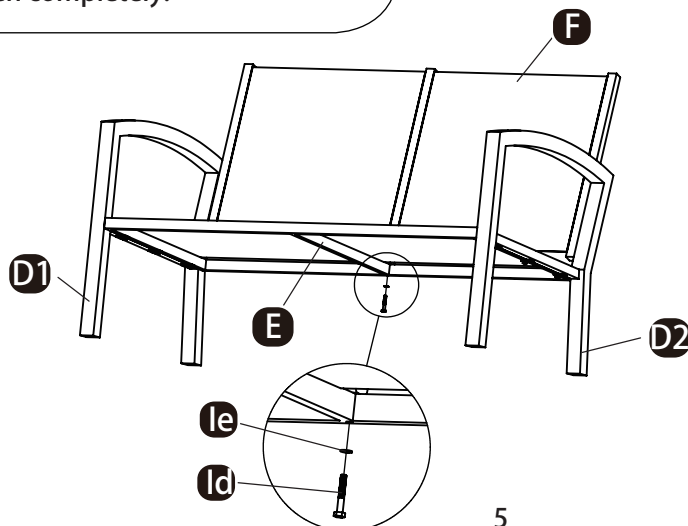

STEP 6

Attach the back (F) to the right arm (D1) with 2 M6 x 40L bolts (ld) and 2 metal washers (le).
Do not tighten completely.
Repeat procedure for the other left arm (D2).

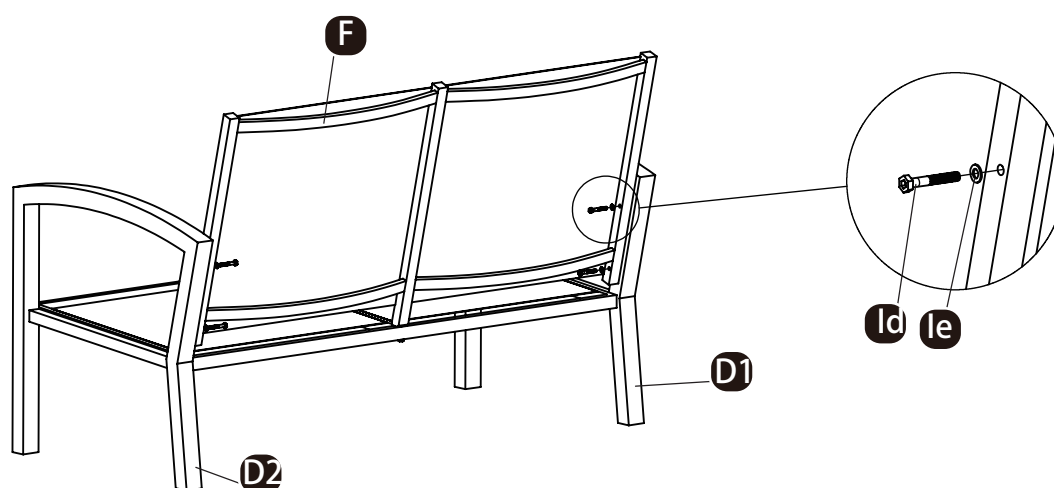

STEP 7

Securely tighten all bolts.
Put the cushions (G&H) on the chair frame.

